


... Maßstab für innovative Befestigungstechniken

Zylinderkopfschrauben DIN 912 / ISO 4762

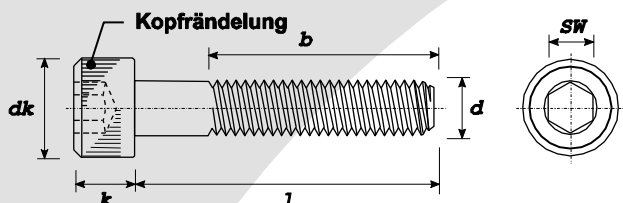

Festigkeitsklasse: 14.9

d [mm]	M 4	M 5	M 6	M 8	M 10	M 12	M 16
dk~ [mm]	7	8,5	10	13	16	18	24
k~ [mm]	4	5	6	8	10	12	16
SW [mm]	3	4	5	6	8	10	12
Ma [Nm]							
Fv [N]							
l [mm]							
6	200						
8	200						
10	200	500	500				
12	200	500	200	200			
16	200	500	200	200	200		
20	200	500	200	200	200	100	
25	200	500	200	200	200	100	50
30	500	500	200	200	100	100	50
35		50	200	200	100	100	100
40		500	200	200	100	100	50
45		500	200	200	100	100	50
50		500	200	200	100	100	50
55				200	100	50	50
60				200	100	50	50
65				200	100	50	50
70				200	100	50	50
80				100	100	50	25
90					100	50	25
100				100	100	50	25
110					100	50	25
120					100	50	25
160							25

Stück je Verpackungseinheit

Ma = Anziehdrehmoment, Fv = Vorspannkraft

